



Building the Solar World with  
Technology & Wisdom



# Sun-Pursuit Series

Monocrystalline  
144 - cell Module

TW-555HT

**530-555W**

0-3% Positive Tolerance

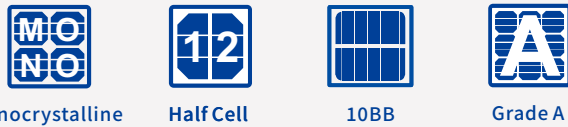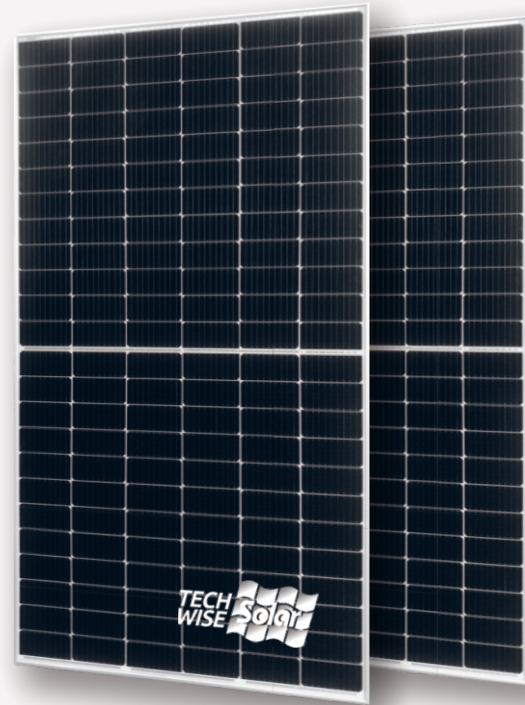

## • MODULE FEATURES

**High Efficiency**  
PERC technology improves efficiency, increases power generation, and contributes to lower LCOE.

**Lower Heat Spot Risk**  
Innovative circuit design and "Half Cell" structure decrease the temperature of heat spots and effectively reduce power loss.

**Excellent Low-light Performance**  
Reliable performance in low-light conditions such as in the morning, at dusk or during raining days.

**Resilient to Extreme Weather**  
Carefully selected materials ensure the module still works well under the condition of 2400Pa wind load and 5400Pa snow load.

**ANTI PID**  
High quality solar cell and advanced processing technology contribute to excellent PID resistance performance.


## • Quality Certification



## • Product Qualification



## • Performance Warranty

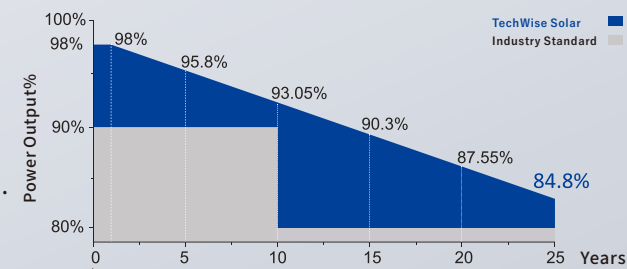

**12** 12 Years Product Warranty

**25** 25 Years Linear Power Warranty




Building the Solar World with  
Technology & Wisdom

## TW-555HT

### • Product Specification •

Cell Type	Mono crystalline
Cell Quantity	144 cell
Cell Size (mm)	182*91
Module Size (mm)	2279*1134*35
Module Weight (kg)	28.5
Glass Thickness (mm)	3.2
Frame Material	Anodized aluminum alloy
Junction Box	IP68
Cable/Connector	4mm <sup>2</sup> , MC4 compatible
Cable Length	+300mm/-300mm; or Customize
Max System Volt (V)	1500V DC
Max Fuse Rate (A)	25
Power Tolerance	0+3%

### • Module Specification •

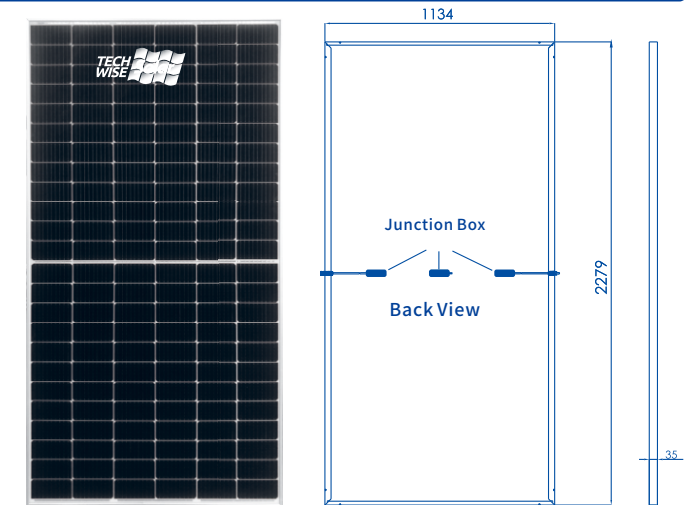

### • Electrical Characteristics •

#### STC standard performance >>>

Power Level	530	535	540	545	550	555
Pmax(W)	530	535	540	545	550	555
Vmp(V)	41.40	41.55	41.70	41.85	42.00	42.15
Imp(A)	12.81	12.88	12.95	13.03	13.10	13.17
Voc(V)	49.25	49.40	49.55	49.70	49.85	50.00
Isc(A)	13.73	13.79	13.85	13.91	13.97	14.02
Module Efficiency (%)	20.51	20.71	20.90	21.09	21.29	21.48

#### NOCT standard performance >>>

Power Level	530	535	540	545	550	555
Pmax(W)	410	405	409	412	416	420
Vmp(V)	38.48	38.67	38.89	39.14	39.28	39.45
Imp(A)	10.42	10.47	10.52	10.53	10.59	10.65
Voc(V)	46.16	46.28	46.40	46.59	46.80	47.01
Isc(A)	11.05	11.09	11.13	11.17	11.21	11.25



STC: Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM1.5

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

### • Temperature Characteristics •

Operating Temp (°C)	-40~85
Operating Humidity (°C)	5~85
Hail Load Tolerance	25mm hailstone with velocity of 23m/s
Temp Coefficient	-0.350
Temp Coefficient Isc (%/°C)	0.05
Temp Coefficient Voc (%/°C)	-0.275
Operating Temp (°C)	44±2

### • I-V Curve •

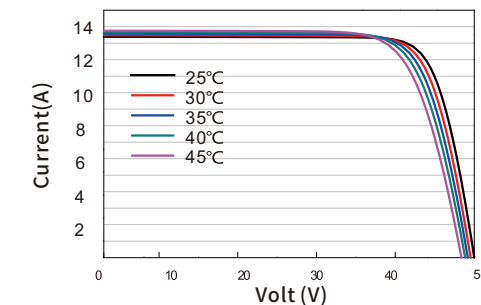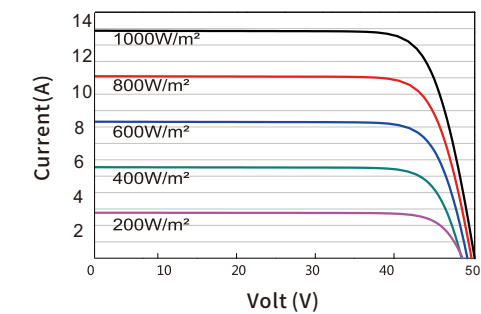

### • Packaging Info •

Pieces per Pallet	31
Size of Packaging (mm)	2305*1125*1270
Weight of per Pallet (kg)	909
Pieces per Container	620
Size of Container	40'HC



Add: Shangman Industrial Park, Caobu Town  
Rudong County, Nantong City, Jiangsu Province, China  
Tel: 86-513-81900128  
Web: www.techwisesolar.com  
Email: salesdept@techwisesolar.com

All data and specifications included in this brochure may subject to be modified without notice.  
All Rights reserved by TechWise Solar Co.  
(Feb 2023 V2 Edition)